

46.7cm/18.5" All-in-One Barebone PC

This sleek 18.5" All-in-One touchscreen PC combines impressive computing power with robust graphics performance. It supports the Intel® Core™ i3/i5/i7 65W desktop processor family and works seamlessly with different applications just as a conventional desktop PC. The HDMI output enables dual-monitoring which can be used for multimedia and presentations on large screens. Together with ample I/O connectivity and VESA mount ready, it can also support a wide variety of professional applications, e.g. kiosk, POS, digital signage, communication platforms, automation and control systems.

Shuttle All-in-One PC **X70M Barebone**

- 18.5" Multi-Touch
- Supports LGA1155 CPUs
- HDMI Port
- Webcam, Card Reader
- 2x USB 3.0, 6x USB 2.0
- RS232 COM Port
- Dual-Gigabit-LAN

Feature Highlight

All-in-one design	<ul style="list-style-type: none"> • Fully featured stylish PC barebone • 100x100 VESA mount compatible
Display & Graphics	<ul style="list-style-type: none"> • 46.7cm (18.5"), Resolution: 1366 x 768 • Resistive 10 finger multi-touch display • Integrated graphics (depending on CPU) • HDMI video outputs
CPU & Chipset	<ul style="list-style-type: none"> • LGA1155 socket supports Intel processors 32/22nm Sandy/Ivy Bridge, TDP max. 65W • Chipset: H61 (Platform Controller Hub)
Memory (not included)	<ul style="list-style-type: none"> • Supports DDR3-1333 • 2x 204 Pin SO-DIMM slots, max. 2x 8GB • Supports one 2.5" SATA hard disk or SSD
Operating System	<ul style="list-style-type: none"> • Operating system not included • Compatible with Windows XP / 7 / 8, Linux
Connectivity	<ul style="list-style-type: none"> • HDMI (supports digital audio) • 2x USB 3.0, 6xUSB 2.0, Microphone, Line-out • Dual RJ45 Gigabit LAN, Wireless LAN (b/g/n) • 1x COM port (RS232) • Optional: 2x COM and 1x LPT (parallel)
Built-in	<ul style="list-style-type: none"> • SD card reader • 2.0 Megapixel webcam • 2x 2 W speakers, Microphone
Power Supply	<ul style="list-style-type: none"> • 120W, fanless, Energy Star 5 compliant
Environment	<ul style="list-style-type: none"> • Operating temp.: 0~40°C • Humidity: 10~90% non-condensing



Available product versions:

Name	Touch function	Shuttle Order No.	UPC code
X70S	1-finger Single -Touch	PAB-X70S011	811686004233
X70M	10-finger Multi-Touch	PAB-X70M011	811686004240

Images for illustration purposes only.




Shuttle All-in-One PC X70M – Connectors



- | | | |
|------------------------------------|-------------------------------------|-------------------------------|
| A 2x USB 2.0 ports | I Power LED indicator | Q Microphone input |
| B Power button | J Hard disk LED indicator | R Headphone / line-out |
| C Webcam | K 2x serial ports (optional) | S 2x LAN ports |
| D Microphone | L Parallel port (optional) | T 2x USB 3.0 ports |
| E Multi Touchscreen display | M Ventilation grilles | U HDMI video port |
| F Stereo speakers | N Kensington® lock hole | V 2x USB 2.0 ports |
| G SD card reader | O Stand / handle | W DC voltage input |
| H 2x USB 2.0 ports | P VESA mount area | X Serial port |

©2013 Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purpose only.

Shuttle All-in-One PC X70M – Mainboard

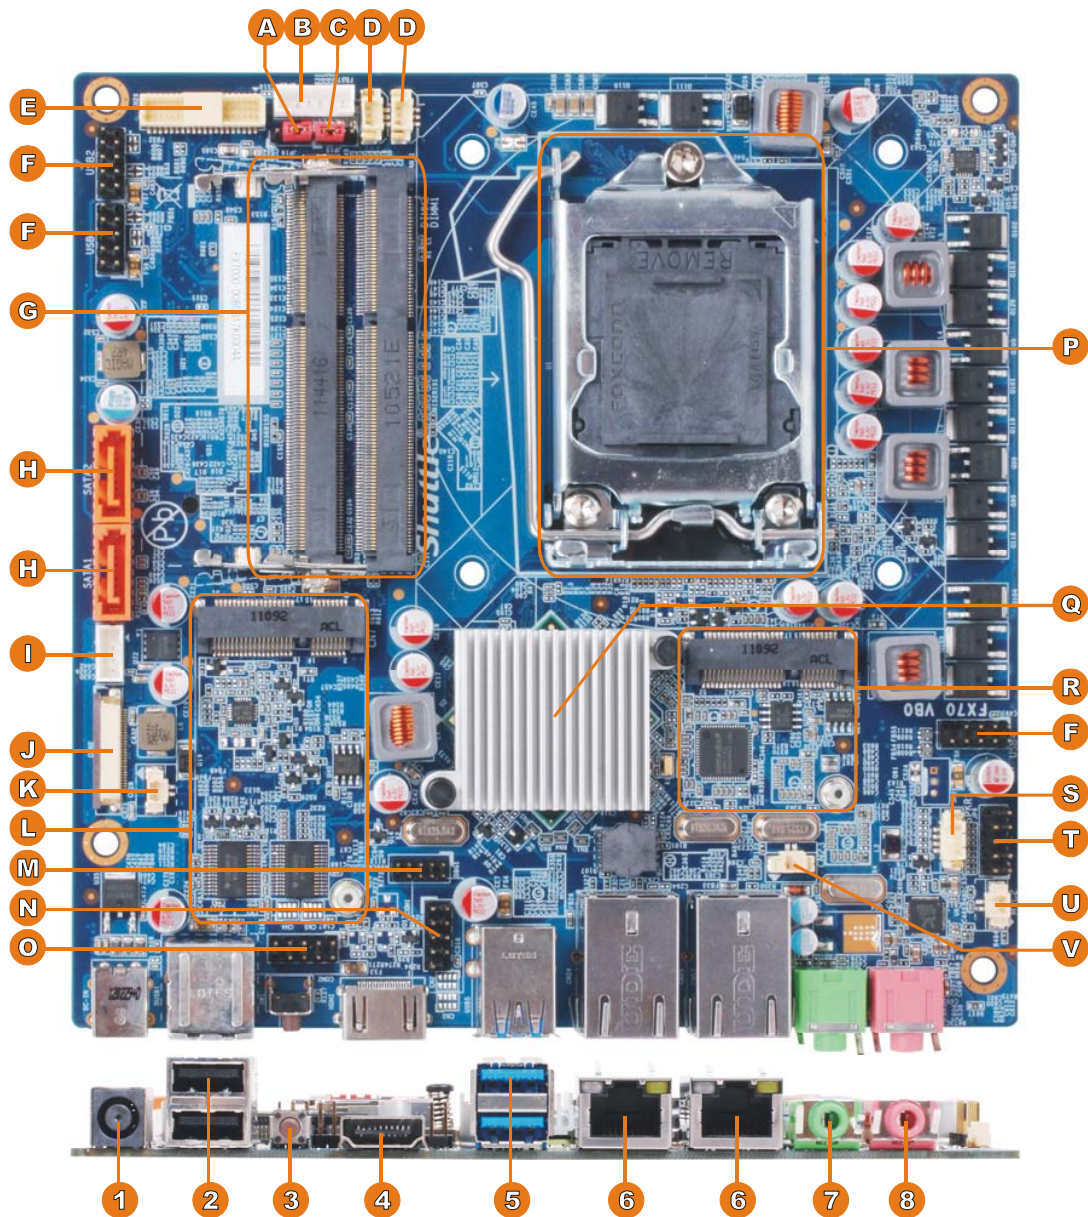

A	Panel voltage selection jumper
B	Power for LVDS
C	Converter voltage selection jumper
D	CPU cooling fan connector
E	LVDS connector
F	USB 2.0 (three headers with 2 ports)
G	Two SO-DIMMs for DDR3 memory
H	Two SATA 3 Gb/s
I	SATA power connector
J	LPC connector
K	Power button
L	Mini-PCIe slot with mSATA, Full-Size
M	EE debug port
N	Serial port COM 1
O	Serial port COM 2

P	LGA1155 socket (max. 65W)
Q	Intel H61 chipset
R	Mini-PCIe slot, half size
S	Speakers connector
T	PWR header
U	Microphone input
V	Battery connector
1	Power connector
2	Two USB 2.0 ports
3	Clear CMOS button
4	HDMI port
5	Two USB 3.0 ports
6	Two Gigabit LAN port
7	Audio Line out
8	Audio Mic in

Shuttle X70M Barebone – Specifications

Chassis	<p>Colour: black, matt / non-glossy Dimensions: 468 x 364 x 57mm (WxHxL) Weight: 6.5 kg gross, 4.6 kg net 100x100 mm VESA mount capable</p>
Operating System	<p>This system comes without operating system. It is compatible with Windows XP, Windows 7, Windows 8 and Linux</p>
Touchscreen	<p>Touchscreen function supports fingertip input Resistive 10-finger multi-touch technology Optionally available with non-touch (X70N) or single-touch (X70S).</p>
Display	<p>46,7 cm / 18,5" LCD display, ratio: 16:9 wide screen panel Resolution: 1366x768 = 1.05 Megapixels Adjustable backlight unit: High power LED</p>
Chipset	<p>Intel® H61 Express Chipset Platform Controller Hub (PCH) Code name: Cougar Point, TDP = 6.1W</p>
BIOS	<p>AMI BIOS in a 8Mbit Flash ROM supports PnP, ACPI 2.0 Supports external USB flash memory card boot up Supports Power fail resume / AC power on state / always on / always off Supports Wake-on-LAN (WOL) from S3, S3, S5 ACPI states Supports Unified Extensible Firmware Interface (UEFI) [1]</p>
Processor Support	<p>Socket 1155 (LGA 1155) supports the second and third generation of Intel Core i3 / i5 / i7 / Pentium / Celeron processors with a power consumption of up to 65W TDP</p> <ul style="list-style-type: none"> - Codename "Sandy Bridge", 32nm process technology and - Codename "Ivy Bridge", 22nm process technology <p>Non-compatible with older Socket-1156 processors. The processor integrates PCI-Express, memory controller and the graphics engine on the same die (depending on processor type) Please refer to the support list for detailed processor support information.</p>
Heatpipe Cooling	<p>Processor heatpipe cooling Processor cooling with heatpipe technology and two fans (6cm)</p>
Memory Support	<p>2x SO-DIMM slots with 204 pins Supports DDR3-1333 SDRAM memory (PC3-10600) Supports Dual Channel mode Supports max. 8 GB per DIMM, maximum total size of 16 GB Supports two unbuffered DIMM modules of 1.5V</p>

©2013 Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purpose only.

<p><i>Integrated Graphics</i></p>	<p>The features of the integrated graphics function [3] depend on the processor type used. "Sandy Bridge" processor: Intel® HD Graphics 2000/3000, DirectX 10.1 "Ivy Bridge" processor: Intel® HD Graphics 2500/4000, DirectX 11 Maximum shared memory size: 1692MB Supports HDMI, max. resolution up to 1920x1200 @ 60Hz Supports HDCP function via HDMI port Supports Full HD 1080p Blu-ray (BD) / HD-DVD playback via the HDMI port Supports Dual-Independent-Display via HDMI and the integrated display HDMI supports HD video plus multi-channel digital audio via a single cable</p>
<p><i>Audio</i></p>	<p>Audio Realtek® ALC 269 High-Definition Audio Two analog audio connectors (3.5 mm): 1) Microphone input 2) Front Line out (head phone) Digital audio output via HDMI</p>
<p><i>Dual Gigabit</i></p>	<p>Dual Realtek 8111E Ethernet network controller (Gigabit) Supports 10 / 100 / 1.000 MBit/s operation With two RJ45 ports (dual network) supports Teaming [4] Supports WAKE ON LAN (WOL) Supports network boot by Preboot eXecution Environment (PXE)</p>
<p><i>Wireless Network (WLAN)</i></p>	<p>Supports IEEE 802.11b/g/n max. 300 Mbps up-/downstream 2T2R: two built-in antennas (2 transmitter, 2 receiver) Half size Mini-PCIe-Card</p>
<p><i>Mini-PCIe</i></p>	<p>X70M features two Mini PCI Express expansion slots: 1) half size, supports PCIe 2.0 and USB 2.0 - occupied by WLAN card 2) full size, supports PCIe 2.0, SATA 3G and USB 2.0 e.g. for Mini SATA (mSATA) flash memory cards [5]</p>
<p><i>Hard Disk Drive or SSD</i></p>	<p>Supports one Serial ATA hard disk (max. 7200 rpm) or one SATA SSD drive in 6.35cm/2.5" format Two SATA 2.0 interface supports up to 300MB/s data transfer speed Supports one drive with 9.5 mm height (12.5 mm is not supported) Supports Unified Extensible Firmware Interface (UEFI) [1]</p>
<p><i>Card Reader</i></p>	<p>Integrated card reader supports SD, SDHC and SDXC memory flash cards</p>
<p><i>Webcam</i></p>	<p>Integrated Webcam module with 2.0 Megapixel (1600x1200) resolution USB interface</p>
<p><i>Microphone and Speakers</i></p>	<p>Front panel with integrated Electret Condenser Microphone and 2x 2W speakers</p>

©2013 Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purpose only.

<p><i>Connectors</i></p>	<p>1x HDMI v1.3 (supports digital video and digital audio) 2x USB 3.0 (back panel) 6x USB 2.0 (2x left side, 2x right side, 2x back panel) 2x Gigabit Network (LAN, RJ45) 1x Microphone input (3,5 mm) 1x Audio Line-out / head phone (3,5 mm) 1x Serial Port (RS232, D-Sub) 1x DC input for external power adapter optional: 2x COM (RS-232 + RS-232/422/485), 1x LPT (parallel)</p>
<p><i>Other Onboard Headers</i></p>	<p>2x fan headers (2x 3 pins) 6x USB 2.0 headers (three 2x5 pins) 1x 24 bit dual channel LVDS port, digital Video port for the display 2x SATA 2.0 connectors (3 Gbps, 300MB/s) 1x SATA power connector 1x LPC header for COM/LPT adapter accessory (optional) 2x RS-232 (two 2x5 pins)</p>
<p><i>LEDs and Buttons</i></p>	<p>Power button Power LED (blue) Hard disk LED (orange) Clear CMOS button</p>
<p><i>Power Adapter</i></p>	<p>External 120 W AC/DC power adapter (fanless) Energy Star 5 compliant AC Input: 100~240 V AC, 50~60 Hz DC Output: 19 V DC, max. 6.32 A</p>
<p><i>Included Accessories</i></p>	<p>Quick Guide Driver DVD 120W Power Adapter Power cord</p>
<p><i>Optional Accessoriess</i></p>	<p>COM/LPT adapter module: 1x parallel and 2x serial (RS-232 + RS-232/422/485) supports voltage supply 0V / 5V / 12V</p>
<p><i>Certifications and Compliance</i></p>	<p>EMI: CE, FCC, BSMI, C-Tick, CCC Safety: CB, BSMI, ETL Other compliances: RoHS, Eup Lot6</p>
<p><i>Environmental Criteria</i></p>	<p>Max. ambient operating temperature range: 0~40°C Humidity: 10~90% non-condensing</p>
<p><i>Conformity</i></p>	<p>This device is classed as a technical information equipment (ITE) in class B and is intended for use in living rooms and offices. The CE-mark approves the conformity by the EU-guidelines:</p> <ul style="list-style-type: none"> - EMV-guideline 89/336/EWG electromagnetic tolerance - LVD-guideline 73/23/EWG use of electric devices within certain voltage-limits

©2013 Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purpose only.

[1] HDMI version

This product uses a HDMI v1.3 port and supports a maximum resolution of 1920 x 1200 pixels.

[2] Unified Extensible Firmware Interface (UEFI) - required when booting from hard disks larger than 2.2 TB under Windows 64 bit operating systems such as Windows 7, Windows Vista SP1 and Windows Server 2008/2003 SP1.

[3] Integrated video output (HDMI)

Not all LGA1155 Intel processors support integrated graphics. Please check the specifications of the processor used. If you want to use the video outputs, then please make sure, that the processor used provides integrated graphics.

[4] Teaming Modus

The teaming function allows you to group both available network adapters together to function as a single adapter - a method of creating a virtual LAN. The benefit of this approach is load balancing and failover.

[5] mini-SATA (mSATA)

Not to be confused with the "micro SATA" connector, is a newer industry standard which converts the electrical SATA interface (1.5 or 3.0 Gbit/s) to the physical "Mini PCI Express" mini card form factor.

2nd Generation Intel Core Processor Family (max. 65W)

LGA1155 socket "32nm Sandy Bridge" processor overview (Date: April 2013)

Name	Model	Cores	HT	Clock	Turbo	Cache	TDP	Graphics	Graphics clock
Celeron	G440	1	-	1.6 GHz	-	1 MB	35 W	HD	650~1000 MHz
	G460	1	Yes	1.8 GHz	-	1.5 MB	35 W	HD	650~1000 MHz
	G465	1	Yes	1.9 GHz	-	1.5 MB	35 W	HD	650~1000 MHz
	G530	2	-	2.4 GHz	-	2 MB	65 W	HD	850~1000 MHz
	G530T	2	-	2.0 GHz	-	2 MB	35 W	HD	650~1100 MHz
	G540	2	-	2.5 GHz	-	2 MB	65 W	HD	850~1000 MHz
	G540T	2	-	2.1 GHz	-	2 MB	35 W	HD	650~1000 MHz
	G550	2	-	2.6 GHz	-	2 MB	65 W	HD	850~1000 MHz
	G550T	2	-	2.2 GHz	-	2 MB	35 W	HD	850~1000 MHz
	G555	2	-	2.7 GHz	-	2 MB	65 W	HD	850~1000 MHz
Pentium	G620T	2	-	2.2 GHz	-	3 MB	35 W	HD	650~1100 MHz
	G620	2	-	2.6 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G622	2	-	2.6 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G630	2	-	2.7 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G630T	2	-	2.3 GHz	-	3 MB	35 W	HD	650~1100 MHz
	G632	2	-	2.7 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G640	2	-	2.8 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G640T	2	-	2.4 GHz	-	3 MB	35 W	HD	650~1100 MHz
	G645	2	-	2.9 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G645T	2	-	2.5 GHz	-	3 MB	35 W	HD	650~1100 MHz
	G840	2	-	2.8 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G850	2	-	2.9 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G860	2	-	3.0 GHz	-	3 MB	65 W	HD	850~1100 MHz
	G860T	2	-	2.6 GHz	-	3 MB	35 W	HD	650~1100 MHz
G870	2	-	3.1 GHz	-	3 MB	65 W	HD	850~1100 MHz	
Core i3	2100T	2	Yes	2.5 GHz	-	3 MB	35 W	HD 2000	650~1100 MHz
	2100	2	Yes	3.1 GHz	-	3 MB	45 W	HD 2000	850~1100 MHz
	2102	2	Yes	3.1 GHz	-	3 MB	65 W	HD 2000	850~1100 MHz
	2105	2	Yes	3.1 GHz	-	3 MB	65 W	HD 3000	850~1100 MHz
	2120	2	Yes	3.3 GHz	-	3 MB	45 W	HD 2000	850~1100 MHz
	2120T	2	Yes	2.6 GHz	-	3 MB	35 W	HD 2000	650~1100 MHz
	2125	2	Yes	3.3 GHz	-	3 MB	65 W	HD 3000	850~1100 MHz
	2130	2	Yes	3.4 GHz	-	3 MB	65 W	HD 2000	850~1100 MHz
Core i5	2390T	2	Yes	2.7 GHz	3.5 GHz	3 MB	35 W	HD 2000	650~1100 MHz
	2400S	4	-	2.5 GHz	3.3 GHz	6 MB	65 W	HD 2000	850~1100 MHz
	2405S	4	-	2.5 GHz	3.3 GHz	6 MB	65 W	HD 3000	850~1100 MHz
	2500T	4	-	2.3 GHz	3.3 GHz	6 MB	45 W	HD 2000	650~1250 MHz
	2500S	4	-	2.7 GHz	3.7 GHz	6 MB	65 W	HD 2000	850~1100 MHz
Core i7	2600S	4	Yes	2.8 GHz	3.8 GHz	8 MB	65 W	HD 2000	850~1100 MHz

K = unlocked, S = Performance optimized lifestyle, T = Power optimized lifestyle, HT = Hyper Threading (SMT).

Intel HD graphics HD 3000/2000 supports 12/6 Execution Units (Shader-Quads) and DirectX 10.1.

Certain processor models do not include integrated graphics.

Please refer to the support list for detailed processor support information at global.shuttle.com.

©2013 Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purpose only.

3rd Generation Intel Core Processor Family (max. 65W)

LGA1155 socket "22nm Ivy Bridge" processor overview (Date: April 2013)

Name	Model	Cores	HT	Clock	Turbo	Cache	TDP	Graphics	Graphics clock
Celeron	G1610	2	-	2.6 GHz	-	2 MB	55 W	HD	650~1050 MHz
	G1610T	2	-	2.3 GHz	-	2 MB	35 W	HD	650~1050 MHz
	G1620	2	-	2.7 GHz	-	2 MB	55 W	HD	650~1050 MHz
Pentium	G2010	2	-	2.8 GHz	-	3 MB	55 W	HD	650~1050 MHz
	G2020T	2	-	2.5 GHz	-	3 MB	35 W	HD	650~1050 MHz
	G2020	2	-	2.9 GHz	-	3 MB	55 W	HD	650~1050 MHz
	G2100T	2	-	2.6 GHz	-	3 MB	35 W	HD	650~1050 MHz
	G2120	2	-	3.1 GHz	-	3 MB	55 W	HD	650~1050 MHz
Core i3	G2130	2	-	3.2 GHz	-	3 MB	55 W	HD	650~1050 MHz
	3210	2	Yes	3.2 GHz	-	3 MB	55 W	HD 2500	650~1050 MHz
	3220T	2	Yes	2.8 GHz	-	3 MB	35 W	HD 2500	650~1050 MHz
	3220	2	Yes	3.3 GHz	-	3 MB	55 W	HD 2500	650~1050 MHz
	3225	2	Yes	3.3 GHz	-	3 MB	55 W	HD 4000	650~1050 MHz
	3240	2	Yes	3.4 GHz	-	3 MB	55 W	HD 2500	650~1050 MHz
Core i5	3240T	2	Yes	2.9 GHz	-	3 MB	35 W	HD 2500	650~1050 MHz
	3330S	4	-	2.7 GHz	3.2 GHz	6 MB	65 W	HD 2500	650~1100 MHz
	3350P	4	-	3.1 GHz	3.3 GHz	6 MB	69 W	-	-
	3450S	4	-	2.8 GHz	3.5 GHz	6 MB	65 W	HD 2500	650~1100 MHz
	3470T	4	-	2.9 GHz	3.6 GHz	3 MB	35 W	HD 2500	650~1100 MHz
	3470S	4	-	2.9 GHz	3.6 GHz	6 MB	65 W	HD 2500	650~1100 MHz
	3475S	4	-	2.9 GHz	3.6 GHz	6 MB	65 W	HD 4000	650~1100 MHz
	3550S	4	-	3.0 GHz	3.7 GHz	6 MB	65 W	HD 2500	650~1150 MHz
Core i7	3570S	4	-	3.1 GHz	3.8 GHz	6 MB	65 W	HD 2500	650~1150 MHz
	3570T	4	-	2.3 GHz	3.3 GHz	6 MB	45 W	HD 2500	650~1150 MHz
	3770T	4	Yes	2.5 GHz	3.7 GHz	8 MB	45 W	HD 4000	650~1150 MHz
	3770S	4	Yes	3.1 GHz	3.9 GHz	8 MB	65 W	HD 4000	650~1150 MHz

K = unlocked, S = Performance optimized lifestyle, T = Power optimized lifestyle, HT = Hyper Threading (SMT).

Intel HD graphics HD 4000/2500 features 16/6 Execution Units (Shader-Quads) and supports DirectX 11/OpenGL 3.1.

Certain processor models do not include integrated graphics.

Please refer to the support list for detailed processor support information at global.shuttle.com.